

# MONOPOINT CM1 HANG STRAIGHT

An innovative solution for sloped ceilings, this monopoint “hang straight” can suspend with a rigid stem up to 4’ in length, for ceiling pitches up to 45° while still allowing for a full 90° tilt.

PROJECT NAME:	TYPE:
---------------	-------



## ORDERING INFORMATION - MONOPOINT



JA8-2022 COMPLIANCE INDICATED BY SHADING

CYLINDER	LENGTH	FIXTURE	BODY FINISH	BAFFLE FINISH	STEM FINISH	CRI / WATTAGE PACKAGE	CCT	OPTIC (UGR)	DRIVER	MEDIA	MOUNTING
<b>CM1</b>		<b>HS1</b>									
CM1 2.60"	LENGTHS SL 3" Standard 24 24" 48 48"  24" AND 48" STEMS ARE FIELD CUTTABLE. 3" STANDARD LENGTH STEM IS MINIMUM LENGTH	ADJUSTABLE DRY / DAMP  HS1 Adjustable 90° Fixture Tilt, Max ceiling pitch 12/12 (45°)	<b>POWDERCOAT</b>	<b>POWDERCOAT</b>	<b>POWDERCOAT</b>	<b>STATIC WHITE</b>	24 2400K* *(90+ CRI only)	10 10° (>19)	<b>INTEGRAL</b>	<b>STANDARD MEDIA</b>  4 Soft Focus Lens  0 No Lens* *(Standard with 10° optic, not available for Warm Dim)	<b>ROUGH-IN</b>  J JBMP 4" Sq. or 4/0 Junction Box Mounting Plate. Features 2.6" diameter canopy* *(Mounting plate must be installed on junction box prior to ceiling installation)
			WH White	WH White	WH White	80S11A 80+ CRI, 11 Watts Lumens Delivered - 1095	27 2700K	15 15° (<13)	CA 0-10V Analog 120-277V		
			BK Black	BK Black	BK Black	90S11A 90+ CRI, 11 Watts Lumens Delivered - 941	30 3000K	20 20° (<10)	CE Electronic ELV / TRIAC 120V		
			AB Architectural Bronze	AB Architectural Bronze	AB Architectural Bronze	97S11A 97+ CRI, 11 Watts Lumens Delivered - 826	35 3500K	25 25° (<10)	RE REMOTE (120V)		
			AG Satin Silver	AG Satin Silver	AG Satin Silver	<b>REMOTE STATIC WHITE</b>	24 2400K* *(90+ CRI only)	10 10° (>19)	RE Electronic ELV / TRIAC		
			AU Cashmere Gold	AU Cashmere Gold	AU Cashmere Gold	80S17A 80+ CRI, 17 Watts Lumens Delivered - 1655	27 2700K	15 15° (<16)	L2 Lutron, Hi-Lume 1% 2-wire		
			BB Burnt Bronze	BB Burnt Bronze	BB Burnt Bronze	90S17A 90+ CRI, 17 Watts Lumens Delivered - 1422	30 3000K	20 20° (<10)	RE REMOTE (120V-277V)		
			CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)	CF Custom Finish* *(Consult Factory)	97S17A 97+ CRI, 17 Watts Lumens Delivered - 1249	35 3500K	25 25° (<10)	RA 0-10V Analog		
			<b>ALUMINA</b>	<b>ALUMINA</b>	<b>ALUMINA</b>	<b>WARM DIM</b>		20 20° (<10)	LH Lutron, Hi-Lume Ecosystem 1% Fade to Black,		
			01 Brushed Obsidian	01 Brushed Obsidian	01 Brushed Obsidian	90W11A 90+ CRI, 11 Watts Incandescent Profile Lumens Delivered - 654	WL 2600K - 1800K	25 25° (<10)	LP Lutron, Hi-Lume Premier Ecosystem 0.1% Fade to Black		
			02 Matte Obsidian	02 Matte Obsidian	02 Matte Obsidian	Halogen Profile Lumens Delivered - 658	WD 2900K - 1800K	40 40° (<10)	EG eldoLED, SOLOdrive 0.1% 0-10V, LOG		
			03 Brushed Dark Patinated Bronze	03 Brushed Dark Patinated Bronze	03 Brushed Dark Patinated Bronze	<b>REMOTE WARM DIM</b>		60 60° (<13)	EN eldoLED, SOLOdrive 0.1% 0-10V, LIN		
04 Matte Dark Patinated Bronze	04 Matte Dark Patinated Bronze	04 Matte Dark Patinated Bronze	90W18A 90+ CRI, 18 Watts Incandescent Profile Lumens Delivered - 1017	WL 2700K - 1800K	20 20° (<10)	ED eldoLED, SOLOdrive 0.1% DALI-2, LOG					
05 Brushed Aged Aluminum	05 Brushed Aged Aluminum	05 Brushed Aged Aluminum	Halogen Profile Lumens Delivered - 1017	WD 3000K - 1800K	25 25° (<10)	AS1 / Athena Control ASR eldoLED, DUALdrive 0.1%*					
06 Matte Aged Aluminum	06 Matte Aged Aluminum	06 Matte Aged Aluminum	SEE PAGE 4 FOR WARM DIM PROFILE COMPARISON		40 40° (<10)	*Includes Athena Node. Increased lead time, consult factory. ASR includes shunt.)					
07 Brushed Cast Brass	07 Brushed Cast Brass	07 Brushed Cast Brass	<b>REMOTE TUNABLE WHITE</b>		60 60° (<13)	CS1 / Casambi Control CSR eldoLED, DUALdrive 0.1%*					
08 Matte Cast Brass	08 Matte Cast Brass	08 Matte Cast Brass	90T17A 90+ CRI, 17W Cool Profile: 5000K - 2700K Lumens Delivered - 888			*Includes Athena Node. Increased lead time, consult factory. CSR includes shunt.)					
09 Brushed Light Patinated Bronze	09 Brushed Light Patinated Bronze	09 Brushed Light Patinated Bronze	Warm Profile: 4000K - 1800K Lumens Delivered. - 896			TUNABLE WHITE POWER SUPPLIES (120-277V)					
10 Matte Light Patinated Bronze	10 Matte Light Patinated Bronze	10 Matte Light Patinated Bronze				DD1 eldoLED, DUALdrive 0.1% DALI-2, LOG					
						TR 4000K - 1800K	DG1 eldoLED, DUALdrive 0.1% 0-10V, LOG				
							DL1 eldoLED, DUALdrive 0.1% 0-10V, LIN				
							AD1 / Athena Control ADR eldoLED, DUALdrive 0.1%*				
							*Includes Athena Node. Increased lead time, consult factory. ADR includes shunt.)				
							CD1 / Casambi Control CDR eldoLED, DUALdrive 0.1%*				
							*Includes Casambi Node. Extended lead time, consult factory. CDR includes shunt)				

### PART NUMBER NOTES

- CM1 ships as e.g., CM124HS1WHBK90S11\*3040CA\*4F
- Remote driver ships as e.g., PS-RMT-90S-11A-1L2\*
- Mounting ships separate from fixture, part numbers listed on page 6.



# MONOPOINT CM1 HANG STRAIGHT

## FINISHES

### POWDERCOAT FINISHES



### ALUMINA FINISHES BY LUCIFER LIGHTING™



## ACCESSORIES

### REPLACEMENT MEDIA

- HCL-CT1** Honeycomb Louver\*  
\*(Not available for Warm Dim)
- CGL-CT1** Clear Glass Lens\*  
\*(Not available for Warm Dim)
- SFL-CT1** Soft Focus Lens
- FGL-CT1** Frosted Glass Lens
- FSFL-CT1** Frosted Soft Focus Lens
- FLSL-CT1** Frosted Linear Spread Lens

### REPLACEMENT OPTICS

Interchangeable optics accessible by removing baffle.

- | Static White   | Warm Dim   | Tunable White  |
|--|--|--|
| <input type="checkbox"/> <b>RO-50-15-S</b> 15° optic | <input type="checkbox"/> <b>RO-50-20-W</b> 20° optic | <input type="checkbox"/> <b>RO-50-15-T</b> 15° optic |
| <input type="checkbox"/> <b>RO-50-20-S</b> 20° optic | <input type="checkbox"/> <b>RO-50-25-W</b> 25° optic | <input type="checkbox"/> <b>RO-50-20-T</b> 20° optic |
| <input type="checkbox"/> <b>RO-50-25-S</b> 25° optic | <input type="checkbox"/> <b>RO-50-40-W</b> 40° optic | <input type="checkbox"/> <b>RO-50-25-T</b> 25° optic |
| <input type="checkbox"/> <b>RO-50-40-S</b> 40° optic | <input type="checkbox"/> <b>RO-50-60-W</b> 60° optic | <input type="checkbox"/> <b>RO-50-40-T</b> 40° optic |
| <input type="checkbox"/> <b>RO-50-60-S</b> 60° optic |  | <input type="checkbox"/> <b>RO-50-60-T</b> 60° optic |

### EMERGENCY LIGHTING - REMOTE MOUNT ONLY

During disruption of main power, emergency battery inverter provides temporary 120V or 277V to fixture.

- EMB-S-25-120/277-LEDX** 25 watt max capacity, 120 or 277 VAC 60Hz, Non-Dimmable
- EMB-S-100-120-LEDX** 100 watt max capacity, 120 VAC 60Hz, 0-10V Dimmable
- EMB-S-100-277-LEDX** 100 watt max capacity, 277 VAC 60Hz, 0-10V Dimmable
- EMB-S-250-120/277-LEDX** 250 watt max capacity, 120 or 277 VAC 60Hz, 0-10V Dimmable

**\*SHUNT REQUIRED FOR USE WITH ATHENA AND CASAMBI CONTROLS, CONSULT FACTORY FOR DETAILS.**

### ZERO-SIGHTLINE MILLWORK ROUTER TOOL GUIDE

Required for zero-sightline millwork installations. Factory recommends qty. 2 per order.

- CMHS-RTG** Router Tool Guide

# MONOPOINT CM1 HANG STRAIGHT

## PERFORMANCE - 3000K

LUMEN PACKAGE	WATTAGE	10° OPTIC NO SOFT FOCUS LENS		15° OPTIC SOFT FOCUS LENS		20° OPTIC SOFT FOCUS LENS		25° OPTIC SOFT FOCUS LENS		40° OPTIC SOFT FOCUS LENS		60° OPTIC SOFT FOCUS LENS	
		DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW	DELIVERED	LPW
80S11A	11	631	57	991	90	1093	99	1095	100	1019	93	1145	104
80S17A	17	861	51	1435	84	1701	100	1655	97	1513	89	1640	96
90S11A	11	544	51	851	86	939	95	941	96	875	89	984	100
90S17A	17	740	41	1233	76	1461	90	1422	87	1300	80	1409	86
97S11A	11	469	43	747	68	824	75	826	75	768	70	864	79
97S17A	17	639	38	1083	64	1283	75	1249	73	1141	67	1237	73
90W11A (2600K-1800K)	11	-	-	-	-	667	60	654	59	605	54	635	58
90W11A (2900K-1800K)	11	-	-	-	-	661	60	658	59	600	54	640	58
90W18A (2700K-1800K)	18	-	-	-	-	1019	56	1017	56	927	57	997	62
90W18A (3000K-1800K)	18	-	-	-	-	1043	57	1017	56	943	58	991	61
90T17A (4000K-1800K)	17	-	-	798	47	917	54	896	53	811	48	910	54
90T17A (5000K-2700K)	17	-	-	791	47	909	53	888	52	803	47	902	53



JA8-2022 INDICATED BY SHADING

### UNIFIED GLARE RATING

10° OPTIC NO LENS	15° OPTIC SOFT FOCUS LENS	20° OPTIC SOFT FOCUS LENS	25° OPTIC SOFT FOCUS LENS	40° OPTIC SOFT FOCUS LENS	60° OPTIC SOFT FOCUS LENS
>19	<16	<10	<10	<10	<16

### MEDIA LIGHT LOSS MULTIPLIER

MEDIA	LIGHT LOSS FACTOR
No Lens	1.05
CGL	0.97
SFL	1.00
FGL	0.85
FSFL	0.82
FLSL	0.78
HCL	0.75
SFL W/ HCL	0.68
FGL W/ HCL	0.47

### OUTPUT MULTIPLIER

CCT	CCT SCALE
2400K	0.85
2700K	0.97
3000K	1.000
3500K	1.03
4000K	1.08

### TUNABLE WHITE MULTIPLIER

CCT	5000K-2700K	4000K-1800K
5000K	1.16	-
4000K	1.08	1.14
3500K	1.04	1.07
3000K	1.00	1.00
2700K	0.96	0.92
2400K	-	0.84
1800K	-	0.69

# MONOPOINT CM1 HANG STRAIGHT

## WARM DIM PERFORMANCE - SOFT FOCUS LENS - 25° OPTIC

INCANDESCENT DIMMING PROFILE

90W11AL 2600K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2600	2550	2520	2450	2200	1925	1800
Light Output (Lm)	654	523	457	327	130	65	13
Power (W)	11	8.8	7.7	5.5	2.2	1.1	.22
Efficacy (LPW)	59	59	59	59	59	59	59

90W18AL 2700K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2600	2650	2620	2520	2180	1950	1800
Light Output (Lm)	1017	813	711	508	203	101	203
Power (W)	18	14.4	12.6	9	3.6	1.8	.36
Efficacy (LPW)	56	56	56	56	56	56	56


HALOGEN WARM DIM PROFILE

90W11AD 2900K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	2900	2850	2800	2720	2350	1975	1800
Light Output (Lm)	658	526	460	329	131	65	13
Power (W)	11	8.8	7.7	5.5	2.2	1.1	.22
Efficacy (LPW)	59	59	59	59	59	59	59


  

90W18AD 3000K - 1800K	Full on 100%	Dimmed to 80%	Dimmed to 70%	Dimmed to 50%	Dimmed to 20%	Dimmed to 10%	Dimmed to 2%
CCT (K)	3000	2950	2920	2775	2375	2000	1800
Light Output (Lm)	1017	813	711	508	203	101	203
Power (W)	18	14.4	12.6	9	3.6	1.8	.36
Efficacy (LPW)	56	56	56	56	56	56	56

11W / 18W

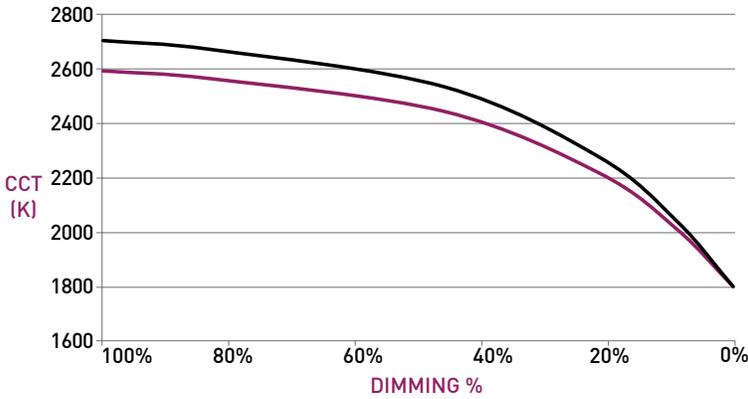

11W / 18W

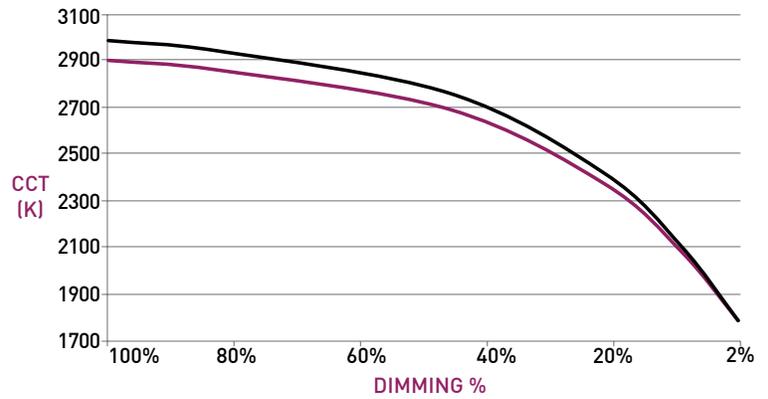


# MONOPOINT CM1 HANG STRAIGHT

## MONOPOINT

- A STEM**  
Standard length is 3", also available in 24" and 48" lengths. All lengths excepts 3" are field cuttable. Powdercoat finishes standard, consult factory for Alumina finishes.
- B BODY**  
Available in powdercoat and Alumina finishes. Power supply integrated into fixture body.
- C OPTICS**  
Robust light engine with optimized optic pairing integrates Reflection, Refraction, and TIR offering 10°, 15°, 20°, 25°, 40° & 60° beams.
- D MEDIA**  
Accepts 2 media; Soft Focus Lens standard.
- E BAFFLE**  
Baffle minimizes aperture glare and conceals view into fixture. Powdercoat finishes standard, consult factory for Alumina finishes.
- F HANG STRAIGHT CANOPY**  
Features hidden ball joint that accomodates installations on up to 12/12 (45°) sloped ceilings.
- G ADJUSTABILITY**  
Features locking 90° tilt and 365° rotation. Stem features 45° tilt to accommodate up to 12/12 slopes.

## DIMENSIONS / DRAWINGS

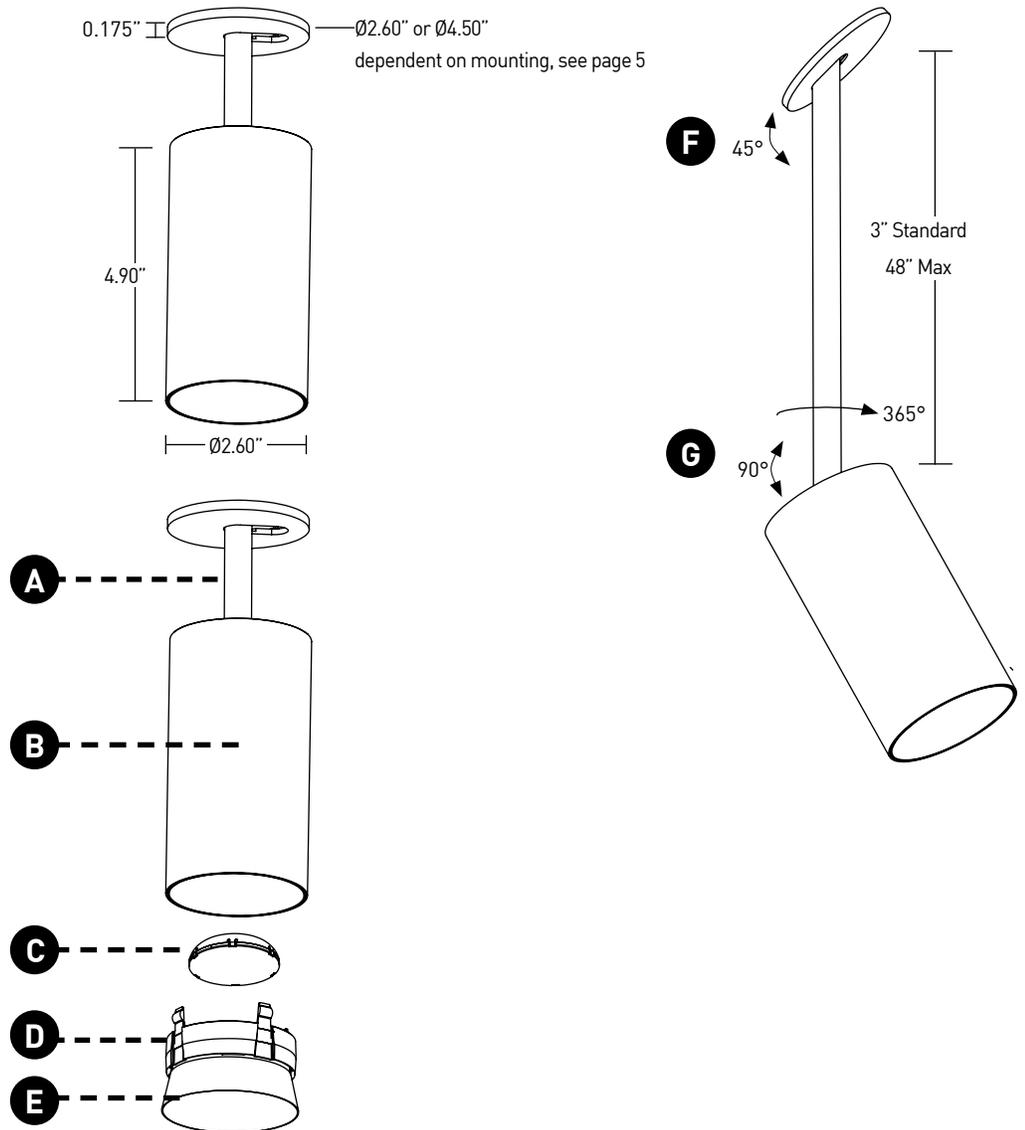

# MONOPOINT CM1 HANG STRAIGHT

## MOUNTING

**IMPORTANT:** Fixture cannot be installed with pancake junction boxes.

### H JUNCTION BOX MOUNTING PLATE

Mounting plate (concealed) for standard 4" square or 4" 4/0 junction boxes. To be installed during rough-in prior to substrate. Features minimalist 2.6" diameter canopy

Part Number - CMHS-JBMP

### I ZERO-SIGHTLINE DRYWALL

Provided with mud-in appliqué that mounts to standard 4" 4/0 junction box. Allows fixture canopy to be recessed into ceiling for a flush or zero-sightline aesthetic. Standard plaster stop thickness of 1/16". Not recommended for stucco applications.

Part Number - DLA-APP-CMHS

### J REMODEL / FLANGE OVERLAY

Provided with oversized canopy and mounting plate for standard 4" square or 4" 4/0 junction boxes. Ideal for existing applications and features oversized 4.5" canopy to cover standard 4" octagon box cutout.

Part Number - CMHS-JBMP


Router Guide Part Number - CMHS-RTG

### K ZERO-SIGHTLINE MILLWORK



Mounting plate (concealed) for standard 4" square or 4" 4/0 junction boxes. To be installed during rough-in prior to substrate. Router guide, specified separately, required to make surface bore allowing fixture canopy to be recessed into ceiling for a flush or zero-sightline aesthetic.

## DIMENSIONS / DRAWINGS




### H JUNCTION BOX MOUNTING PLATE

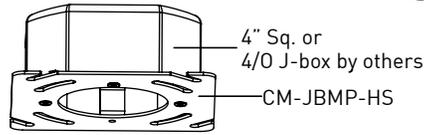



INSTALL JBMP BEFORE CEILING

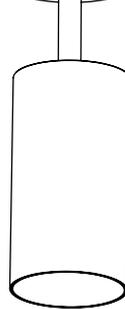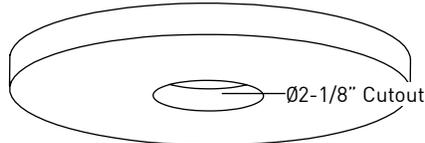


### I ZERO-SIGHTLINE DRYWALL

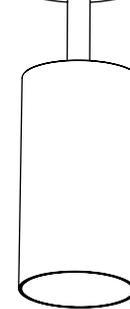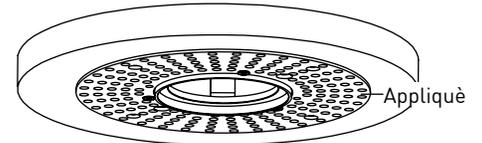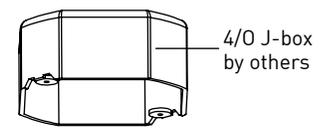




### J REMODEL / FLANGE OVERLAY

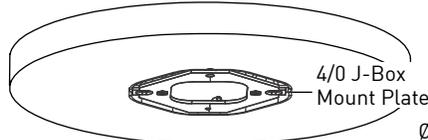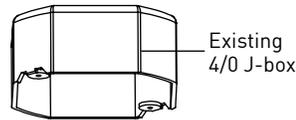

### K ZERO-SIGHTLINE MILLWORK

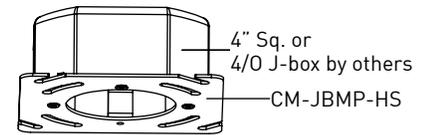

INSTALL JBMP BEFORE CEILING

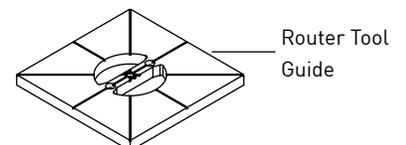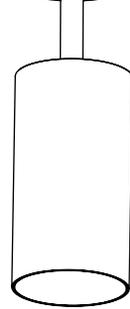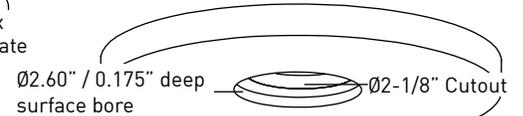

# MONOPOINT CM1 HANG STRAIGHT

## REMOTE POWER SUPPLY

**L** Remote power supply provides additional driver options. See page 8 for maximum allowable wiring distance. Must be installed in an accessible location.

**M** ATHENA / CASAMBI CONTROL  
Controls integrated into remote driver assembly. All equipment is serviceable.

Athena Model Numbers: A-WN-D01-RF-BL & DFC-OEM-DBI


Casambi Model Number: BT-S1E1-5400

**N** ATHENA / CASAMBI EM SHUNT  
Included with drivers specified as ASR, ATR, CSR, or CTR. One required for each wireless EM fixture, requires class 2 control wiring between fixture and shunt. Features integrated test switch.

Model Number: PS-RMT-SHUNT



## DIMENSIONS / DRAWINGS

**L**

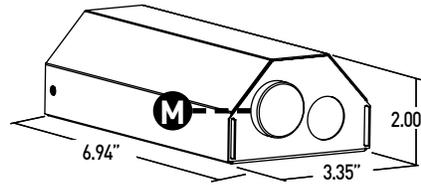

**N**

ATHENA / CASAMBI  
EM SHUNT

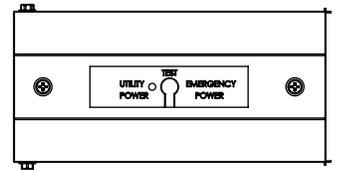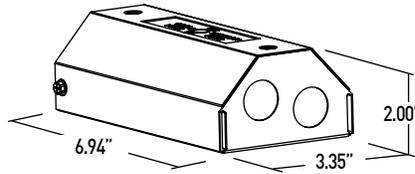

# MONOPOINT CM1 HANG STRAIGHT

## TECHNICAL

### CONSTRUCTION

**Monopoint:** Machined aluminum body; painted finishes are granulated powder coat; Alumina finishes are anodized aluminum.

**Remote Power Supply:** 22 Gauge galvanized steel.

**Appliqué:** Machined Aluminum

### STATIC WHITE LED

2-step MacAdam ellipse LED module available in 80+, 90+ and 97+ CRI configurations in color temperatures of 2700K, 3000K, 3500K and 4000K.

3-step MacAdam ellipse LED module available in 90+ CRI configurations in color temperature of 2400K. Average rated lamp life of 50,000 hours.

### WARM DIM LED

3-step MacAdam ellipse warm dim LED module available in 90+ CRI configuration. 3000K or 2700K at full brightness, warming to 1800K at full dim. Average rated lamp life of 50,000 hours.

### TUNABLE WHITE LED

3-step MacAdam ellipse tunable white LED module available in 90+ CRI configuration. Features tuning ranges of 1800K to 4000K and 2700K to 5000K. Average rated lamp life of 50,000 hours.

### POWER SUPPLY PERFORMANCE AND DIMMING INFORMATION

Power Supply	PHASE		ECO		0-10V					DALI-2	ATHENA		CASAMBI	
	CE/RE	L2	LH	LP	CA/RA	SG	SN	EG	EN	ED	AS	AT	CS	CT
Minimum °C	-20 °C	0 °C	0 °C	0 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C	-20 °C
Maximum °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C	40 °C
Dimming %	2.0%	1.0%	1.0%	0.1%	2.0%	1.0%	1.0%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%

Note: For L2, LH, LP, SG, SN, EG and EN drivers consult chart on page 9 to confirm appropriate dimming curve for compatibility with selected control.

### MAXIMUM ALLOWABLE REMOTE DRIVER WIRING DISTANCES

DRIVER	WIRE AWG				
	12	14	16	18	20
RA, RE	-	164'	105'	66'	40'
SG, SN	285'	180'	113'	71'	45'
L2, LH, LP	60'	40'	25'	15'	-
EG, EN, ED, AS, AT, CS, CT	-	-	118'	72'	46'

### LISTING

cTUVus listed to UL1598 standard for Dry / Damp locations.

Title 24 JA8-2022 Listed. NEMA 410 Compliant.

### DECLARE

LBC Red List Approved.

### BUY AMERICA ACT

All CM1 Hang Straight fixtures are BAA compliant.

### LIMITED WARRANTY

Manufacturer's Limited Warranty guarantees product(s) listed to be free from defects in material and workmanship under normal use and service for 1-year. LED and power supplies are warranted to operate with 70% of original flux and remain within a range of 3 duv for a period of 5-years.

10-year Lutron Advantage limited warranty available on Lutron equipped systems. Warranty period begins from the date of shipment by Seller.

[Consult website for full warranty terms and conditions.](#)

### CHANGE LOG

1.02/13/2024: ADDED TUNABLE WHITE OFFERING.

# MONOPOINT CM1 HANG STRAIGHT

## DIMMING COMPATABILITY

### PHILIPS DRIVER COMPATIBILITY

Power supply <b>SG</b> Manufacturer	Family/Model #
Lutron Electronics	DVTV plus PP-DV
Lutron Electronics	DVSCTV plus PP-DV
Lutron Electronics	DVSTV
Lutron Electronics	DVSCSTV
Lutron Electronics	QSGRJ-XP plus GRX-TVI
Lutron Electronics	QSGRJ-XE plus GRX-TVI
Lutron Electronics	QSGR-XE plus GRX-TVI
Lutron Electronics	NFTV plus PP-DV
Lutron Electronics	NTSTV
Lutron Electronics	RMJ-5T
Lutron Electronics	RMJS-8T
Lutron Electronics	FCJS-010
Leviton	IllumaTch IP7 series
Philips	Sunrise - SR1200ZTUNV


### LUTRON DRIVER COMPATIBILITY

Power supply <b>L2</b> Lutron Product Family	Part No.
Maestro WirelessR 600 W dimmer	MRF2-6ND-120-
Maestro WirelessR 1000 W dimmer	MRF2-10ND-120-
Caséta® Wireless Pro 1000 W dimmer	PD-10NXD-
GRAFIK T™ CL® dimmer	GT-250M-GTJ-250M-
HomeWorks® QS adaptive dimmer	HQRD-6NA-
HomeWorks® QS 600 W dimmer	HQRD-6ND-
HomeWorks® QS 1000 W dimmer	HQRD-10ND-
RadioRA® 2 adaptive dimmer	RRD-6NA-
RadioRA® 2 1000 W dimmer	RRD-10ND
myRoom™ DIN power module	MQSE-4A1-D
HomeWorks® QS DIN power module	LQSE-4A1-D
HomeWorks® QS wallbox power module	HQRJ-WPM-6D-120
HomeWorks® wallbox power module	HWI-WPM-6D-120
GRAFIK Eye® QS control unit	QSGR-, QSGRJ-
GRAFIK Eye® 3000 control unit	GRX-3100-GRX-3500-
RPM-4U module (LCP, HomeWorks® QS, GRAFIK Systems™, Quantum®)	HW-RPM-4U-120 LP-RPM-4U-120
RPM-4A module (LCP, HomeWorks® QS, GRAFIK Systems™, Quantum®)	HW-RPM-4A-120, LP-RPM-4A-120
GP dimming panels	Various
Ariadni CL 250W dimmer	AYCL-253P-
Diva CL 250W dimmer	DVCL-253P-DCSCCL-253P-
Nova T CL 250W dimmer	NTCL-250-
Power supply <b>LH / LP</b> Lutron Product Family	Part No.
PowPak Dimming Modules	RMJ-ECO32-DV-B
PowPak Dimming Modules	FCJ/FCJS-ECO
Energi Savr Nodes	QSN-1ECO-S
GRAFIK Eye QS control unit	QSN-2ECO-S
Homeworks QS control unit	QSGRJ- _E (wireless) QSGR- _E
Quantum Hub	QP2-__ 2C
Quantum Hub	QP2-__ 4C
Quantum Hub	QP2-__ 6C
Quantum Hub	QP2-__ 8C
Homeworks QS power module	LQSE-2ECO-D
myRoom Plus power module	

### eldoLED DRIVER COMPATIBILITY

Power supply <b>EG</b> Manufacturer	Family/Model #
Busch-Jaeger	2112U-101
Jung	240-10
Leviton Lighting Controls	IP710-DLX
Lightolier Controls	ZP600FAM120
Merten	5729
Pass & Seymour	CD4FB-W
The Watt Stopper	DCLV1
Synergy	ISD BC
Crestron®	GLX-DIMFLV8
Crestron®	GLXP-DIMFLV8
Crestron®	GLPAC-DIMFLV4-*
Crestron®	GLPAC-DIMFLV8-*
Crestron®	GLPP-DIMFLVEX-PM
Crestron®	GLPP-1DIMFLV2EX-PM
Crestron®	GLPP-1DIMFLV3EX-PM
Crestron®	DIN-A08
Crestron®	DIN-4DIMFLV4
Crestron®	CLS-EXP-DIMFLV
Crestron®	CLCI-1DIMFLV2EX
Power supply <b>EN</b> Manufacturer	Family/Model #
Lutron Electronics	Nova T® - NTFTV
Lutron Electronics	Diva® - DVTV
Lutron Electronics	Nova® - NFTV
Lutron Electronics	GraxEye® GRX-TVI w GRX3503
Lutron Electronics	Energy Savr Node™ - QSN-4T16-S
Lutron Electronics	TVM2 Module
Sensor Switch	nI0 EZ
ABB	SD/S 2.16.1

## ANALOG DRIVERS AND DIMMERS

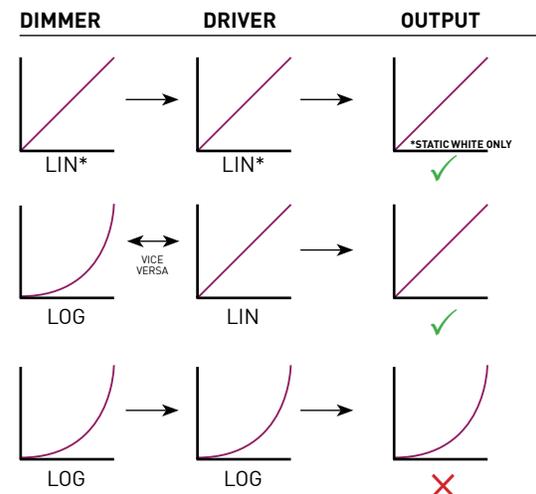

LIN = LINEAR  
 LOG = LOGARITHMIC  
 \*LIN-TO-LIN NOT COMPATIBLE FOR WARM-DIM

